


Anti-Virus

Anti-Virus protection must be ICSA Labs certified as well as in compliance with NCIC 2000 standards. Anti-Virus protection must be installed and actively updated using some type of automated "live update" feature.

Firewalled Access

Only traffic destined for the Dept. of Safety's network offerings will be permitted to access the frame cloud.

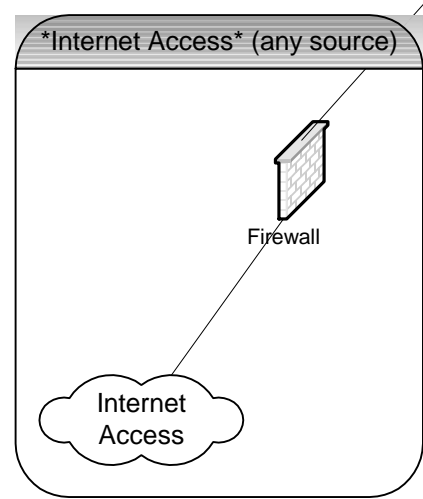

PC configuration

PC's with no Internet access or dial-up access will have (1) network card with routing turned "off", to utilize the security features of having the two networks "separate".

PC's with any type of Internet access requiring a 2nd NIC card to be installed in the system must have routing turned "off", to utilize the security features of having the two networks "separate". This will also require any computer "hooked up" to both networks via NIC card to be running either a software based firewall that is ICSA Labs Certified or have a hardware based firewall "inline" before the router to the MAAP network.

The previously stated standard of NIC card configuration also will apply to any servers or virus protection servers on both networks.

MAAP project		
Single PC access for MAAP	8/23/2005	56 kb. Frame Circuit